


Adhesive application for coated glass TENDANCES - CERAFRIT - CERAPRINT - OPACICOAT


Adhesives should be applied in 1/8" caulking beads. Spacing is left to the installer's judgement. Allow time to cure to ensure adhesion. Proper air circulation is essential.

SUGGESTED:

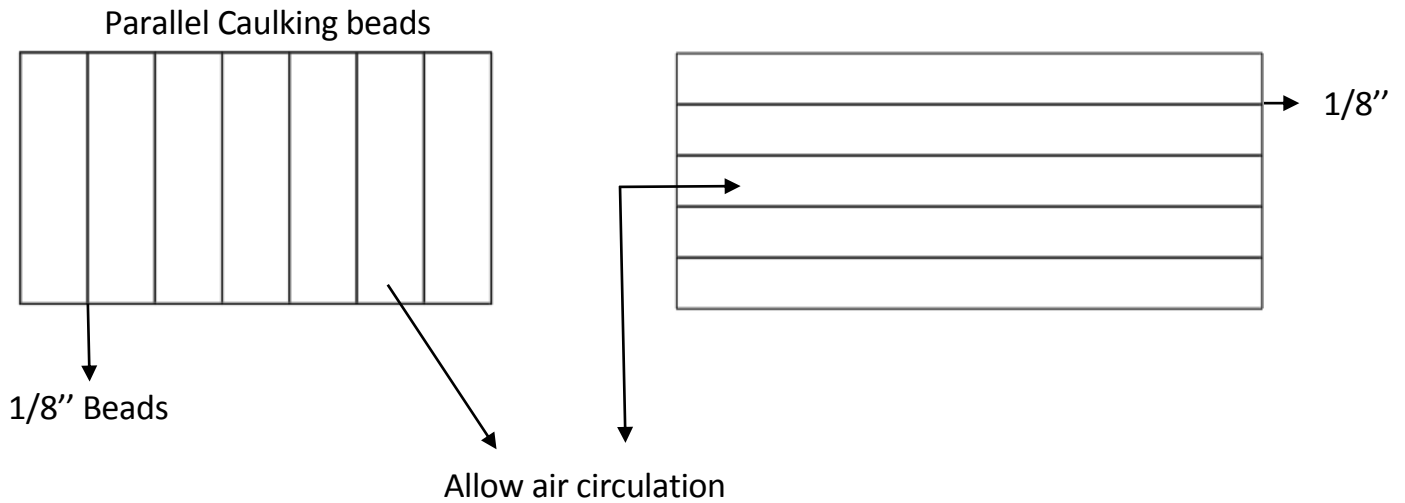

WRONG:

"Hockey Pucks"

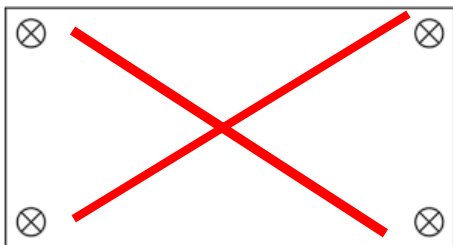

Caulking beads all around

